




Description

The heavy-duty barrel clamp used for connecting Linx Transfer is provided with a rubber gasket. The solid clamp handles can be secured against inadvertent opening by means of a lock pin (supplied by others).

Temperature range -22 to +167 °F continuous
 -40 to +185 °F intermittent

Available in diameters 3" - 20"

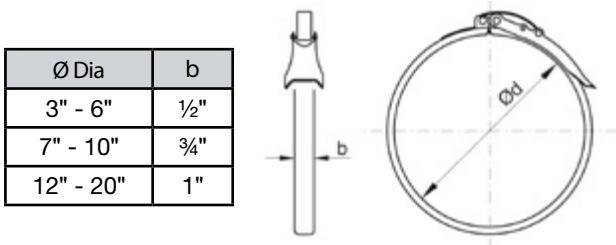

Order Example




Description

The standard barrel clamp used for connecting Linx Transfer is provided EPDM rubber gasket and a thread spring. The clip split handle can be secured against inadvertent opening by means of a lock pin (supplied by others).

Temperature range -22 to +167 °F continuous
 -40 to +185 °F intermittent

Available in diameters 3" - 20"

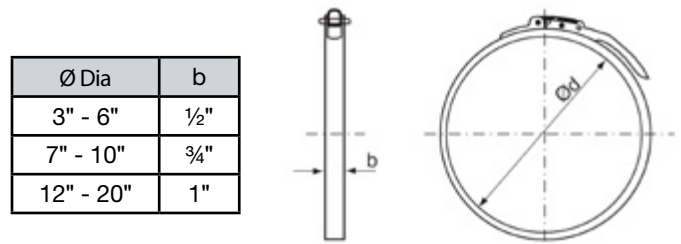

Order Example

